


# CAE\_B-6Moti2LDR-01

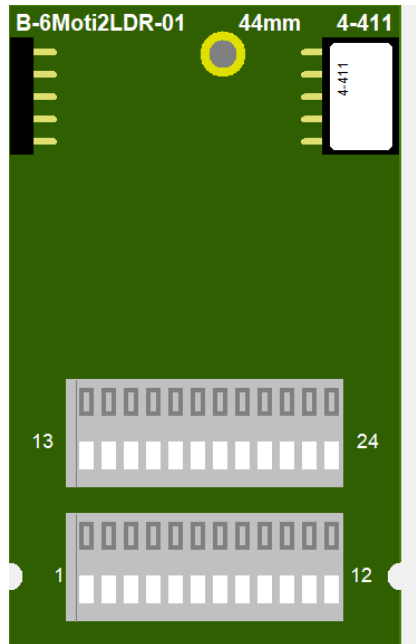

## 1.1 Description

ID: 4-411

Order No.: CAE\_B-6Moti2LDR-01 (-p)

Terminal: push-in ( $\leq 0.5\text{mm}^2$ )

Size: 4 eU (44mm x 72mm)


BBFCP: 1-1-1

Weight: 30g

The module includes six voltage inputs and two inputs for a LDR sensor.

For each input/sensor double terminals (ground, input) are available. An additional connected terminal field can be used for power supply distribution to the sensors. Therefore a direct connection of the sensors without separate clamps is available.

## 1.2 Connectors and Indication-/Operation-Elements

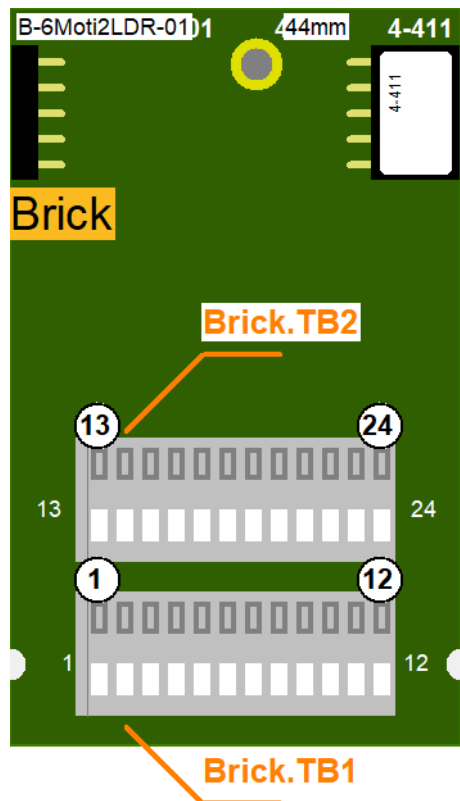

### 1.2.1 Terminal block (TB)

The following Illustration the technical details for Terminal blocks are listed. The location of a specific block is documented with the ID (left column) in the previous Illustrations.

ID	Model	Model / Series	Grid	Num. of term.	connection	elec. usage
Brick.TB01	Cage Terminal	WAGO250	2.5mm	12	up to 0.5mm <sup>2</sup> or 0,8mm	signal level
Brick.TB02	Cage Terminal	WAGO250	2.5mm	12	up to 0.5mm <sup>2</sup> or 0,8mm	signal level

### 1.2.2 Terminal assignment

Here the assignment of individual terminals and there affiliation to terminal blocks (Te block), terminal numbers (Te no.) and short description (T.desc.) aswell as there electrical function and usage are explained.

The associated mechanical and electrical properties are stated with the specific terminal block in the previous chapter. The position of a terminal is dedicated through the "Te block" and the actual terminal number (Te no.) or the thermanal description (T.descr.) in the previous Illustration respectively.

In the column "usage" the technical-/ device-functional use is listed.

Te block	Te no.	T. descr.	Function	Usage
Brick.TB00	0	24V	Sensor supply +24V	Moti1


Brick.TB00	1	IN	Input	Moti1
Brick.TB00	2	0V	Ground	Moti1
Brick.TB00	3	24V	Sensor supply +24V	Moti2
Brick.TB00	4	IN	Input	Moti2
Brick.TB00	5	0V	Ground	Moti2
Brick.TB00	6	24V	Sensor supply +24V	Moti3
Brick.TB00	7	IN	Input	Moti3
Brick.TB00	8	0V	Ground	Moti3
Brick.TB00	9	24V	Sensor supply +24V	Moti4
Brick.TB00	10	IN	Input	Moti4
Brick.TB00	11	0V	Ground	Moti4
Brick.TB00	12	24V	Sensor supply +24V	Moti5
Brick.TB00	13	IN	Input	Moti5
Brick.TB00	14	0V	Ground	Moti5
Brick.TB00	15	24V	Sensor supply +24V	Moti6
Brick.TB00	16	IN	Input	Moti6
Brick.TB00	17	0V	Ground	Moti6

### 1.2.3 LED Indications

ID	Type	Specification	Type / Usage
Brick.StateLED	SMD-LED	yellow	communicationstate Brick

### 1.3 Input-/Output Scheme

The following diagram shows the adaption of the control unit. To avoid overlapping, some wires are displayed interrupted and dashed.

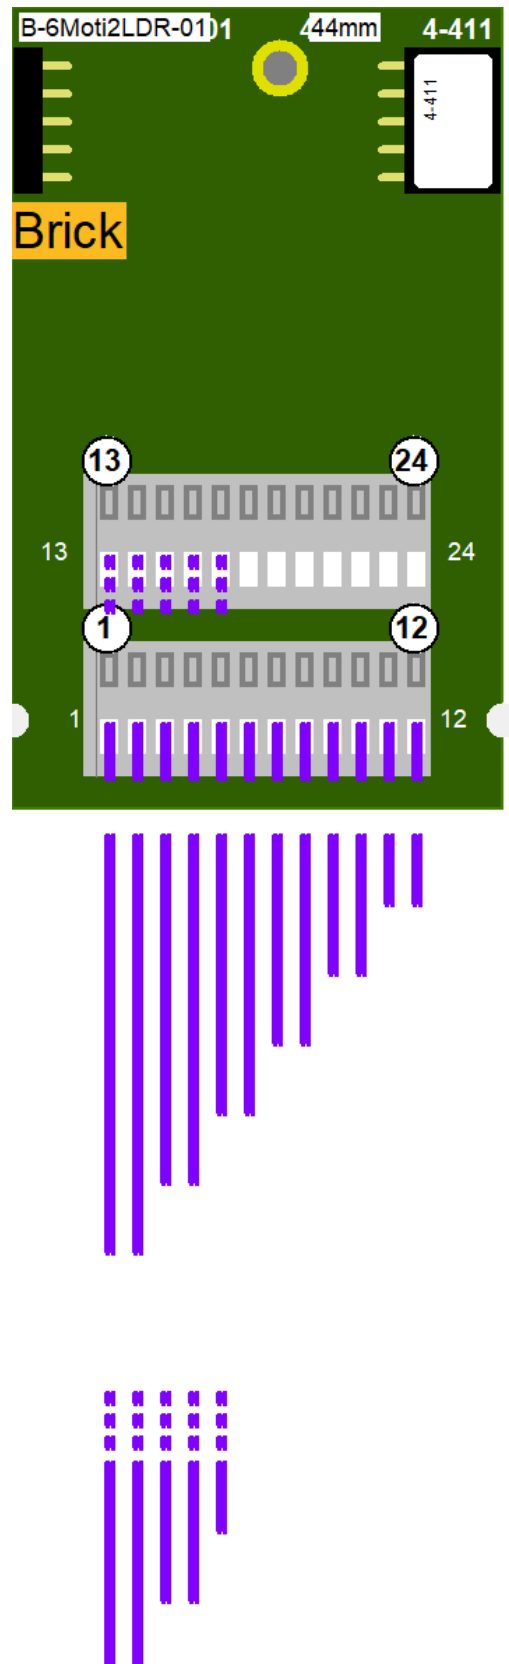

## 1.4 Technical Data

### 1.4.1 Analog Inputs

The control unit has the following analogue inputs / measuring inputs:

Identifier	Moti1
Type	Voltage Input
Range	0 ... 5V, 2/3-wire
Input/Load Resistor	>50k
Resolution	
Accuracy	0.5%
Linearity	0.2%
Filter	100Hz
Linearization	
Model / Series	
Remark	Sensor power supply (24V) is provided; note overall capacity

Identifier	Moti2
Type	Voltage Input
Range	0 ... 5V, 2/3-wire
Input/Load Resistor	>50k
Resolution	
Accuracy	0.5%
Linearity	0.2%
Filter	100Hz
Linearization	
Model / Series	
Remark	Sensor power supply (24V) is provided; note overall capacity

Identifier	Moti3
Type	Voltage Input
Range	0 ... 5V, 2/3-wire
Input/Load Resistor	>50k
Resolution	
Accuracy	0.5%
Linearity	0.2%
Filter	100Hz
Linearization	
Model / Series	
Remark	Sensor power supply (24V) is provided; note overall capacity

Identifier	Moti4
Type	Voltage Input
Range	0 ... 5V, 2/3-wire
Input/Load Resistor	>50k
Resolution	
Accuracy	0.5%
Linearity	0.2%
Filter	100Hz

Linearization	
Model / Series	
Remark	Sensor power supply (24V) is provided; note overall capacity

Identifier	Moti5
Type	Voltage Input
Range	0 ... 5V, 2/3-wire
Input/Load Resistor	>50k
Resolution	
Accuracy	0.5%
Linearity	0.2%
Filter	100Hz
Linearization	
Model / Series	
Remark	Sensor power supply (24V) is provided; note overall capacity

Identifier	Moti6
Type	Voltage Input
Range	0 ... 5V, 2/3-wire
Input/Load Resistor	>50k
Resolution	
Accuracy	0.5%
Linearity	0.2%
Filter	100Hz
Linearization	
Model / Series	
Remark	Sensor power supply (24V) is provided; note overall capacity

### 1.4.2 User Notes

- Blinking behavior StateLED:  
Each Morse code is 3 seconds long!  
not initialized = flashing continuously at approx. 5Hz  
no communication = short-long-short  
too little communication = short-short-short  
disturbed communication = short-long-long  
OK = continuous flashing at approx. 1Hz (0.6-1.5Hz)

## 1.5 History

On the following page you will find a list of changes that have been made to the product.

### 1.5.1 History

Date	Entry scope (HW, SWappl, SWapi, Release)	Entry type (enhancement, improvement, bugfix, release)	Version	Status (development, implemented, tested)	Responsible	Reason for the modification	Items of modification	Impact for (end-)customer	Comment	Location in model/source
xxxx-xx-xx		Release	0.99	Tested	NSt					

For questions please contact:

emBrick GmbH	Alfred-Nobel-Straße 2 D-55411 Bingen am Rhein	+49 (0)6721-48035-70	<a href="https://www.embrick.de/">https://www.embrick.de/</a> <a href="https://www.embrick.de/shop/support@embrick.de">https://www.embrick.de/shop/ support@embrick.de</a>
--------------	--	----------------------	---